


# FCF<sup>SERIES</sup>

**Feel Cool Fast** Self Contained Air Conditioning Systems

**Webasto**  
Marine Comfort

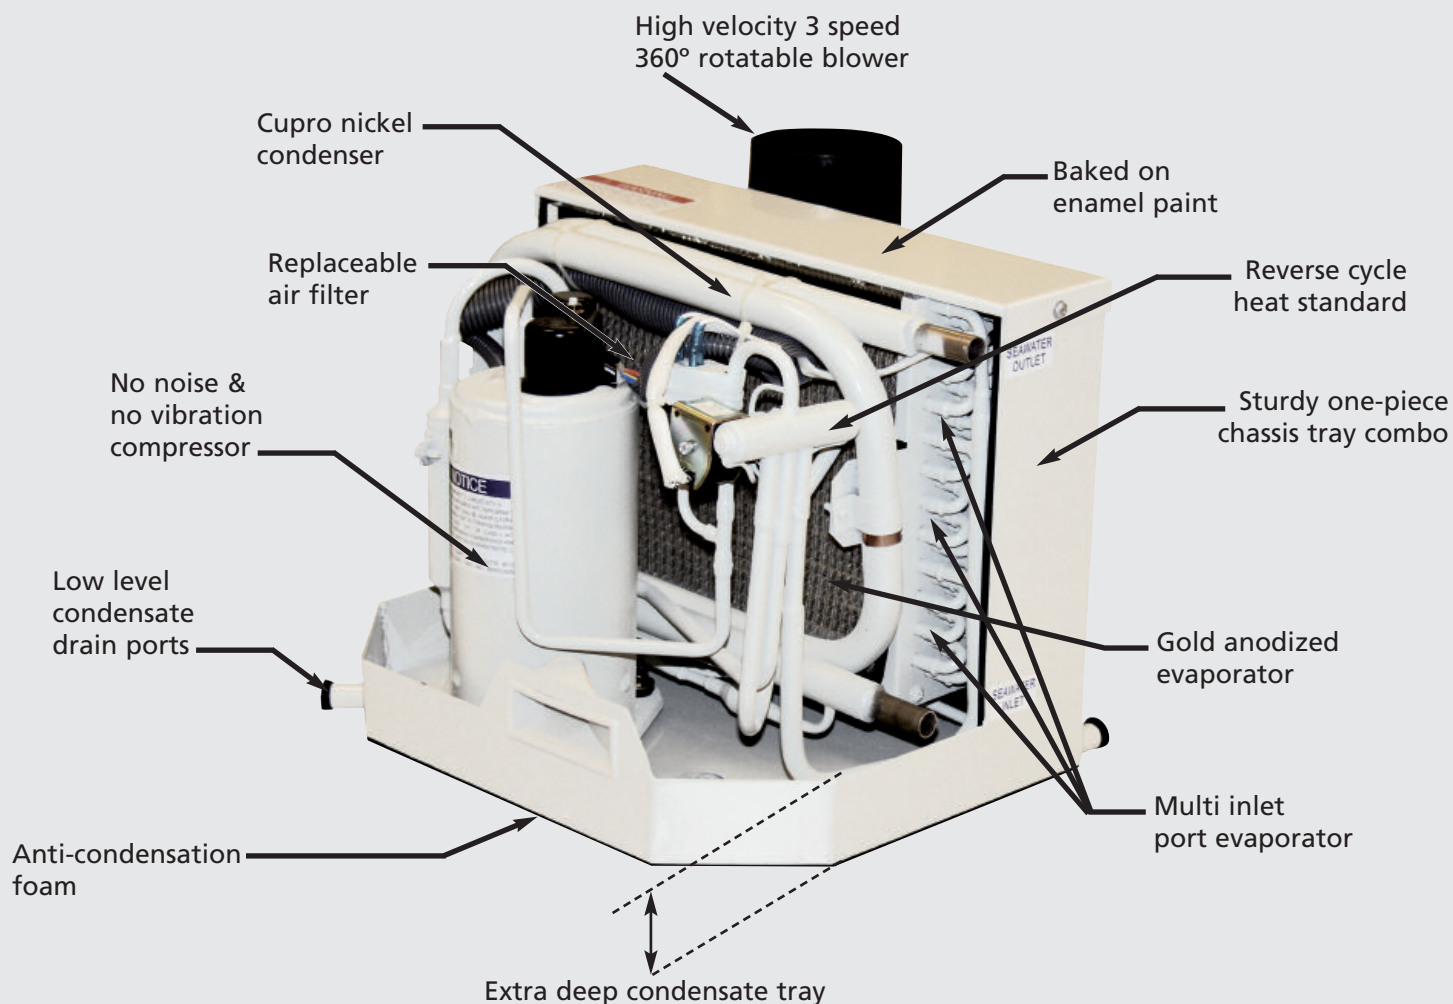

## FCF Air Conditioning is available exclusively in North America.

*The pleasures of having air conditioning on a vessel go a long way. A voyage in hot weather is made more comfortable when cabins are dehumidified and the crew stays cool. FCF utilizes a condenser system which offers an all-inclusive unit that retrofits easily, is user-friendly, has an extensive range of accessories, and is made with seawater-resistant materials.*

*Each FCF unit comes standard with a 4 or 5 inch ducting collar, high velocity 360 degree rotatable blower, remote mount electrical box, digital control with bezel, remote control, air filter, and reverse cycle heat.*



*Standard remote mount electrical box with electrical diagram*




*Electronic controller with interchangeable bezels*



*Standard remote control*

- A** Space-saving integration of the air conditioning system in the cabin
- B** Even distribution of cool air via the cold-air outlets
- C** Controls – simple and logical to use
- D** Electrical box
- E** Seawater pump
- F** Seawater outlet

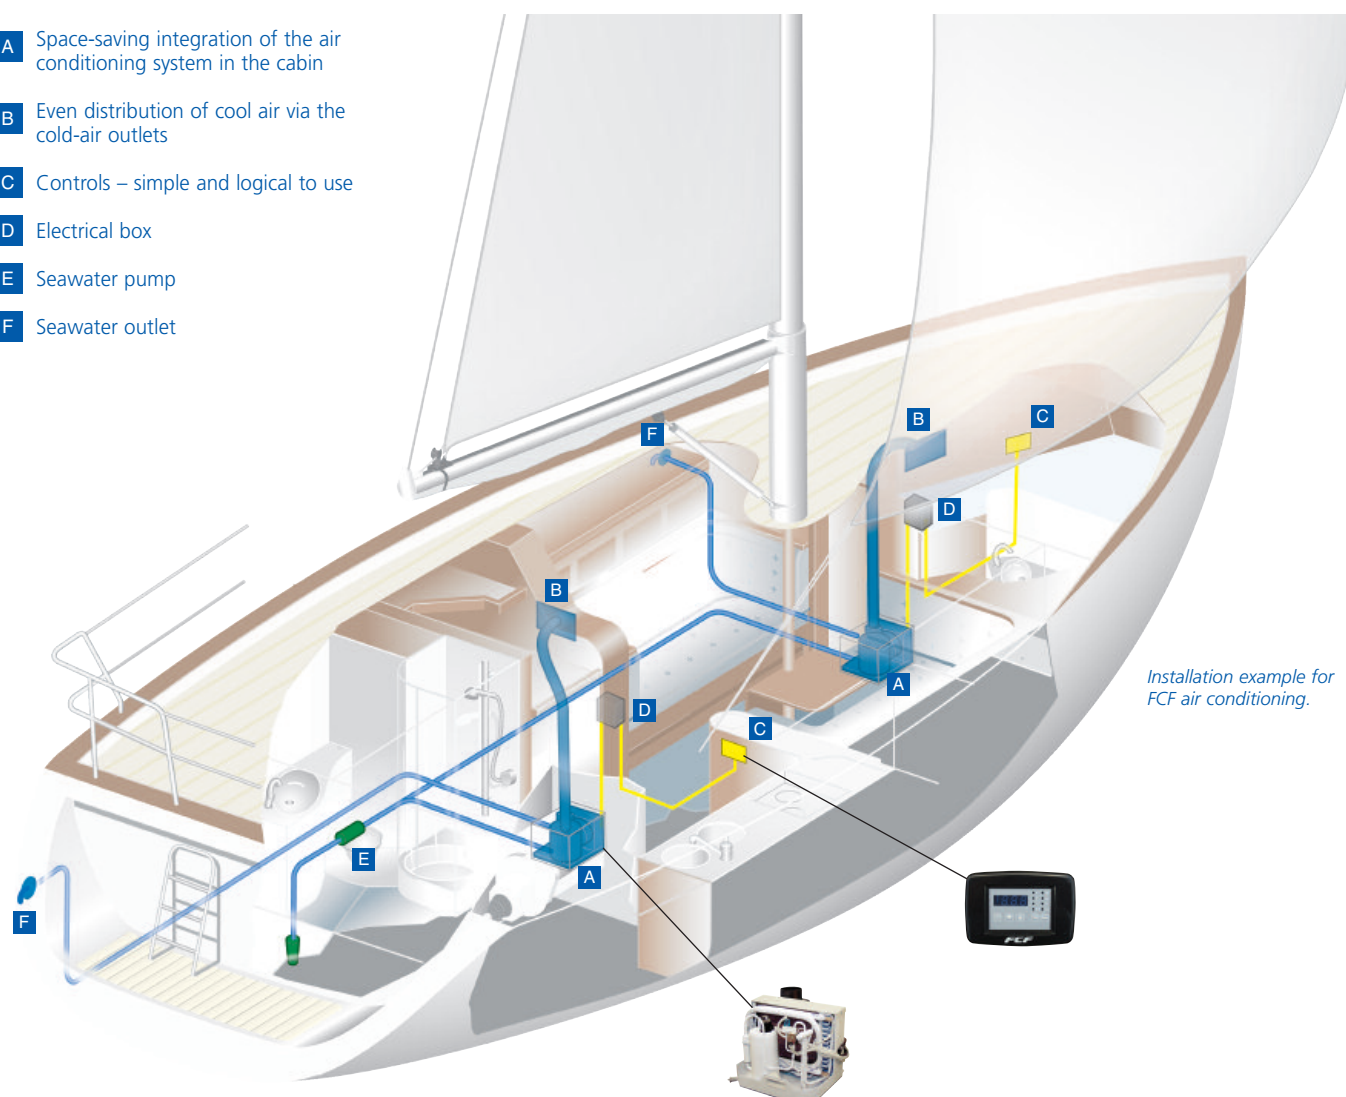

## Specifications

	Part Number	Capacity	Min. Suggested Supply Air	Min. Suggested Return Air	Voltage	Frequency	Average Load Amps	Net Weight	Blower Output	Ducting Collar Diam.	Condenser Conn. Diam.	Dimensions: Length x Depth x Height
FCF 5,000	FCF0005000	5,000 Btu (1.5 kW)	16 in <sup>2</sup> (103.2 cm <sup>2</sup> )	49 in <sup>2</sup> (316 cm <sup>2</sup> )	115V/ 230V	50/60 Hz	4.4 A/ 2.2 A	50 lbs. (23 kg)	282 cfm (479 m <sup>3</sup> /h)	4 in. (102 mm)	5/8 in. (15 mm)	11 13/32 x 14 7/8 x 11 19/32 in. (290 x 378 x 295 mm)
FCF 9,000	FCF0009000	9,000 Btu (2.6 kW)	16 in <sup>2</sup> (103.2 cm <sup>2</sup> )	64 in <sup>2</sup> (413 cm <sup>2</sup> )	115V/ 230V	50/60 Hz	6.4 A/ 3.2 A	57 lbs. (26 kg)	344 cfm (584 m <sup>3</sup> /h)	4 in. (102 mm)	5/8 in. (15 mm)	14 7/8 x 15 1/2 x 11 19/32 in. (378 x 394 x 295 mm)
FCF 12,000	FCF0012000	12,000 Btu (3.5 kW)	20 in <sup>2</sup> (129 cm <sup>2</sup> )	100 in <sup>2</sup> (645 cm <sup>2</sup> )	115V/ 230V	50/60 Hz	8.5 A/ 4.2 A	68 lbs. (31 kg)	410 cfm (696 m <sup>3</sup> /h)	5 in. (127 mm)	5/8 in. (15 mm)	14 7/8 x 16 7/64 x 12 7/8 (378 x 409 x 327 mm)
FCF 16,000	FCF0016000	16,000 Btu (4.7 kW)	24 in <sup>2</sup> (154.8 cm <sup>2</sup> )	121 in <sup>2</sup> (780.6 cm <sup>2</sup> )	115V/ 230V	50/60 Hz	11 A/ 5.5 A	75.75 lbs. (33 kg)	505 cfm (858 m <sup>3</sup> /h)	5 in. (127 mm)	5/8 in. (15 mm)	17 11/16 x 17 5/16 x 12 11/16 in. (450 mm x 439 x 322 mm)

Webasto Partner:

**FCF**<sub>SERIES</sub>